
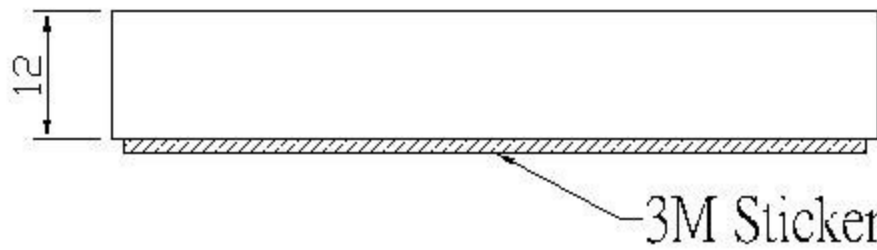


	Cable	OD	Cover	Connector	Frequency	Impedance
GNSS	RG316/U	ø2.6±0.2	Black	SMA M (Gold-plated)	1575.42/1602MHz	50Ω
LTE					700~960MHz 1710~2170MHz 2.5G~2.7G	
WIFI					2.4G/5.2G~5.8G	

**ROHS**

ISO 9001  
ISO 14001

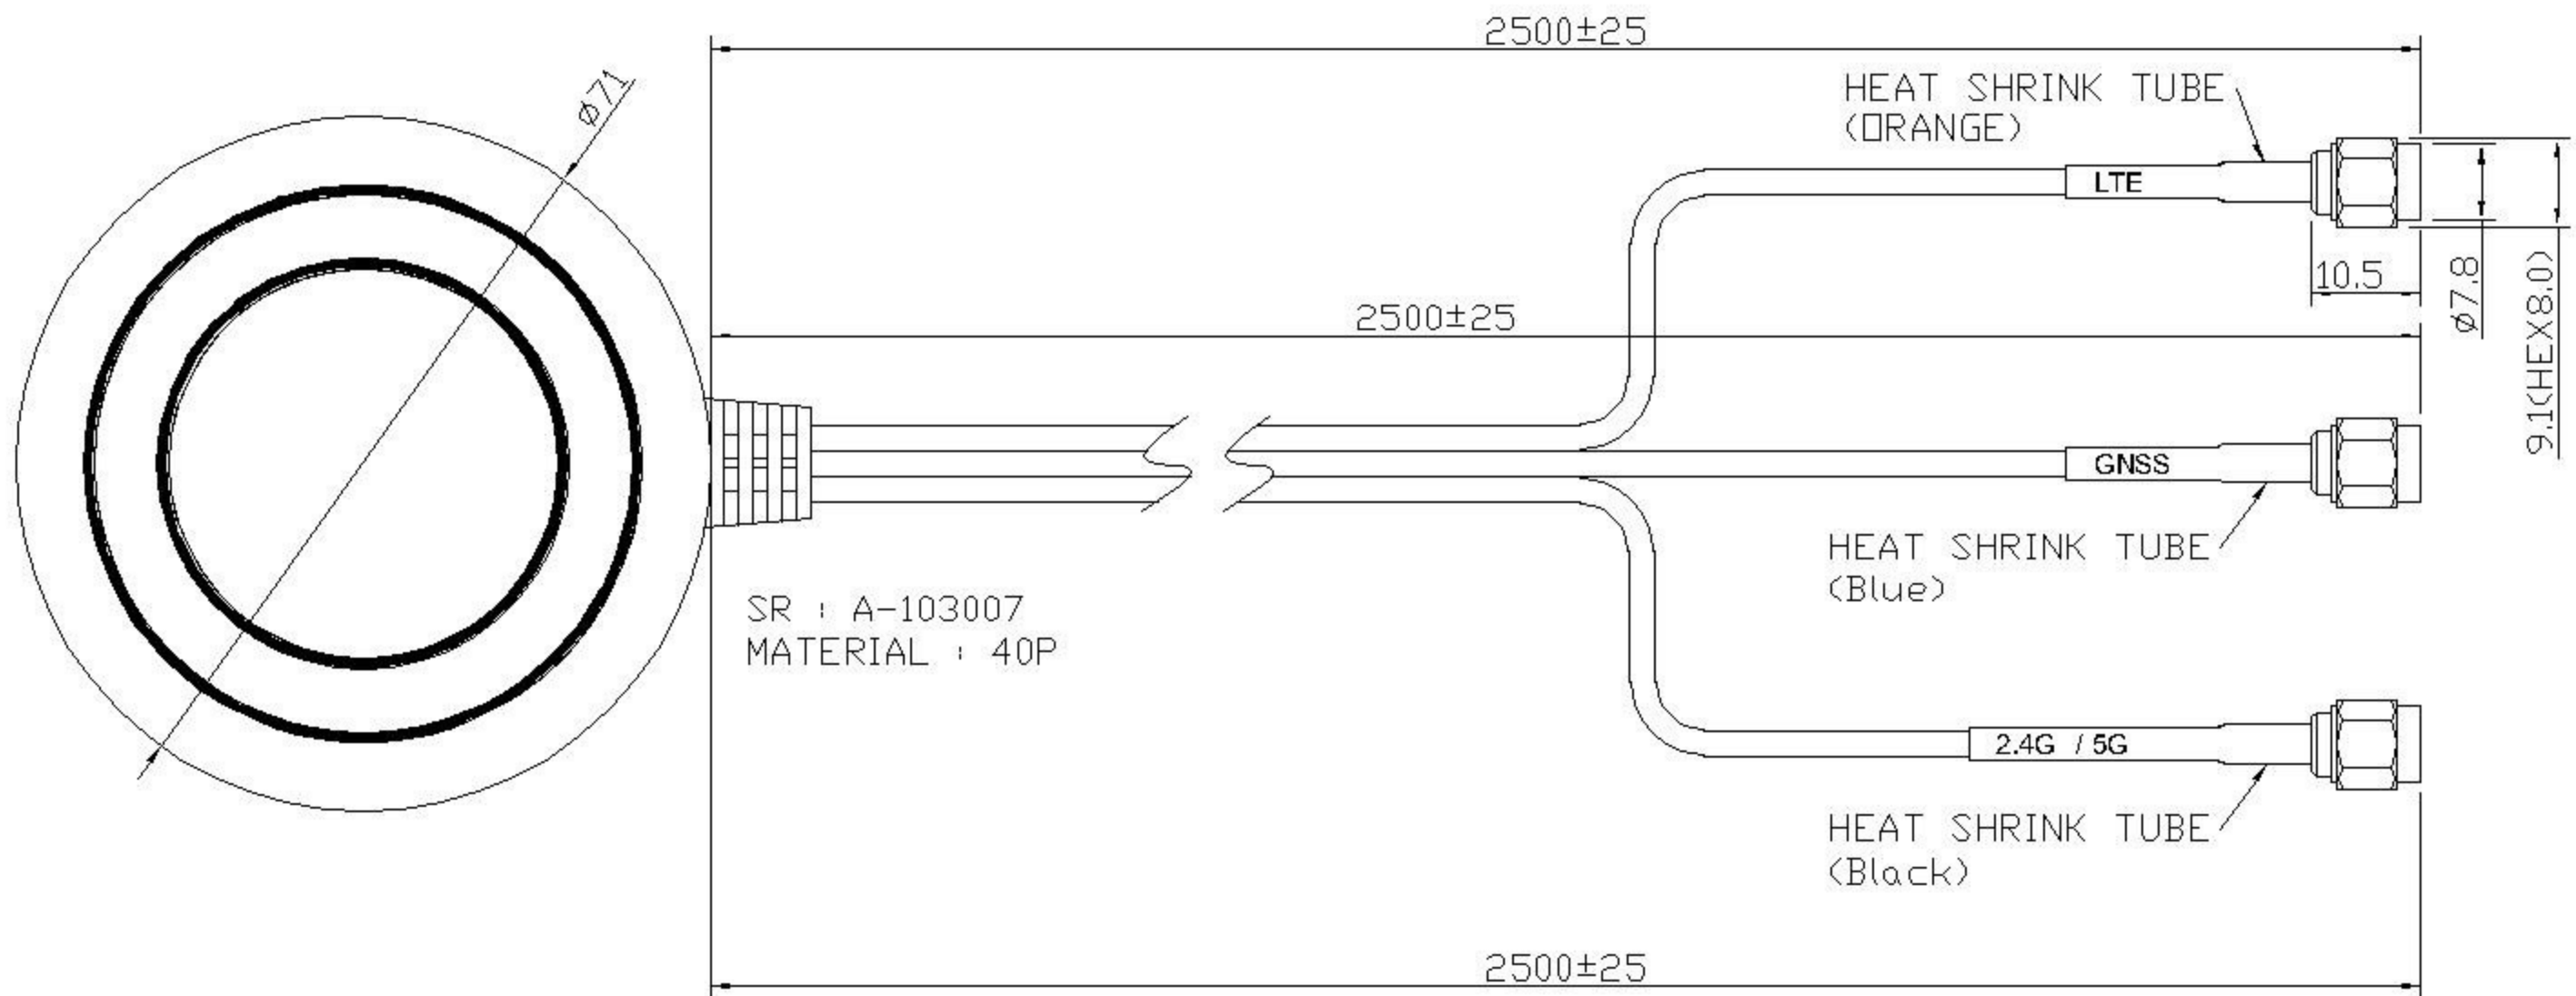

NO	DESCRIPTION	MATERIAL / FINISH	Q'TY
Part NO			

Material:		Treatment:		TRANSVOICE			
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	
			X=±0.5 .X=±0.2 .XX=±0.1 .XXX=±0.05	Ver: A	Scale 1:1	Model NO	202-042
				File NO: QR0402		Drawing NO	100-27001-0211